



Conveyor chains

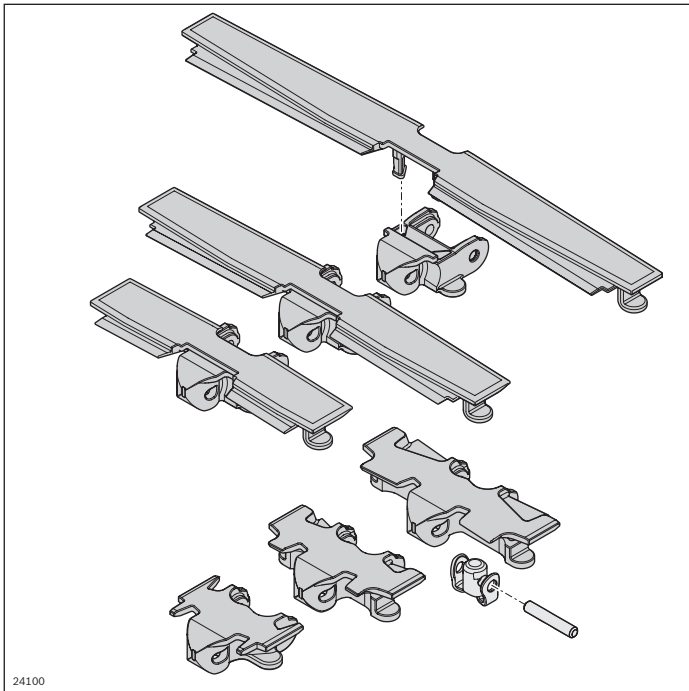

- ▶ Quiet and smooth-running parts transport thanks to patented conveyor chains
- ▶ Optimized antifriction properties of the chains
- ▶ Chain links uncoupled by means of different materials (patented)
- ▶ FDA-compliant materials
- ▶ Low-vibration transport of small parts and accumulation option by covering the chain links
- ▶ Easy-to-exchange chain plate from size 160
- ▶ Wide variety of chain types suitable for different applications

Flocked chain

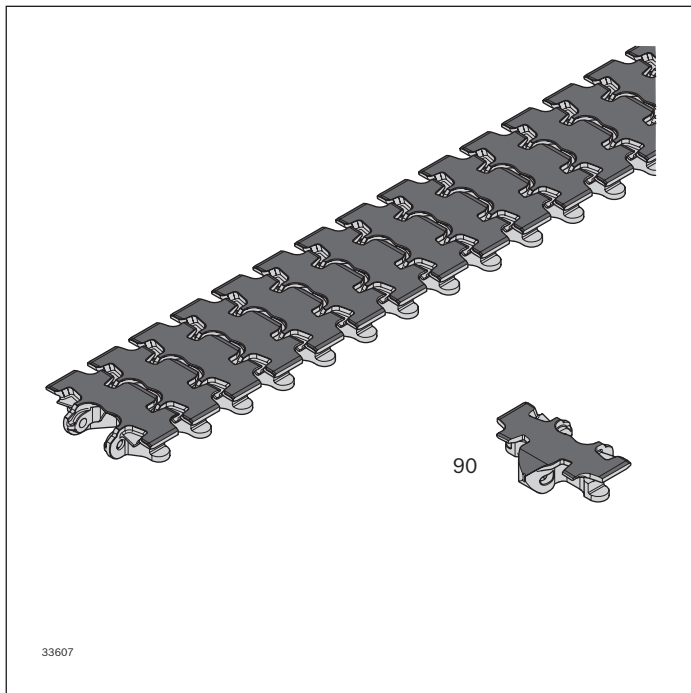

The flocked chain is used on sensitive transport surfaces (e.g. gloss, clear, barcode, raised printing).

- Transport on ascending or descending sections up to about 7° possible, depending on the product (test required)
- For products susceptible to jams
- Only dry use
- Maximum permissible tracking force: 5 N/chain link
- Maximum chain tensile force: 1250 N
- Size: 90
- Not suitable for sharp-edged products
- Combination with chain links of different chain types is not permitted

Notice:

Not suitable for standard VarioFlow *plus* WT system.

- ▶ Soft PA-flocking 3.3 dtex for sensitive product surfaces
- ▶ Extremely quiet chain running thanks to the patented chain design

Scope of delivery:


- Chain: Complete, incl. chain pin and pivot pin


Condition on delivery:

- Chain: Fully assembled

Material:

- Chain link: POM, white
- Flocking: PA 3.3 dtex, anthracite
- Chain pin: Non-rusting steel 1.4301
- Pivot pin: PA66

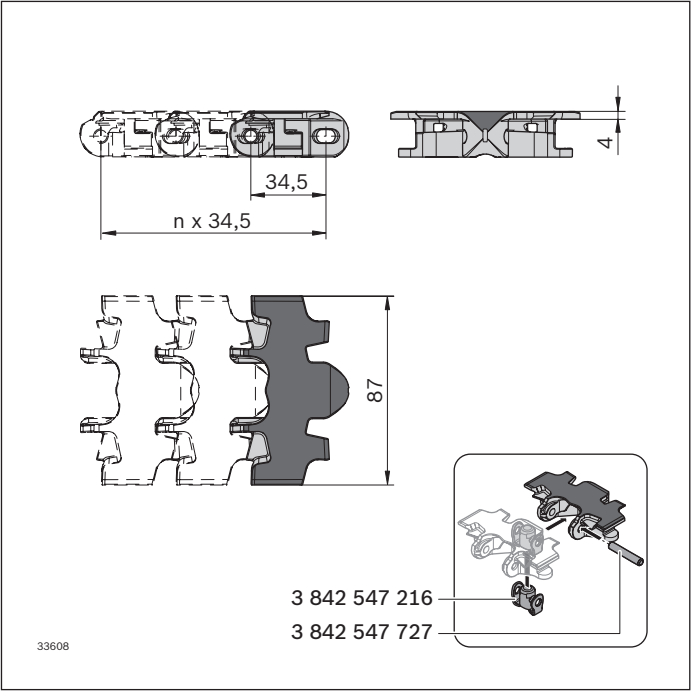

Flocked chain VFplus 90	L (mm)		No.
Conveyor chain	4968	1	3 842 553 023
Chain pin	100		3 842 547 727
Pivot pin	100		3 842 547 216