



At the Heart of Gas Detection Systems

Gas Detection Systems

Dräger

Technology for Life

Detecting hazards – quite simple in principle

Why it is worth knowing more about gas detection sensors

Our sensory organs are often unable to detect airborne hazards, or cannot do so early enough. Toxic or flammable gases and vapors can build up, reaching hazardous concentrations, or there may be insufficient oxygen in the air. Both of these scenarios can have life-threatening consequences.

The reliability with which harmful airborne substances can be detected depends to a large extent on the sensors that are used. It is essential for the gas detector and sensor to be adapted perfectly to each other. Hazards must be identified in good time and dependably, and false alarms leading to production downtime and the like must be avoided. You entrust the safety and protection of your personnel, equipment and property to a sensor, so it is worth looking at the technology behind it.

In former times, miners took canaries with them into the mine shaft. They made hazardous changes in the air underground easily visible: while the bird sat on its perch, everything was fine, but if it was lying on the floor, there was the threat of danger. The birds tended to come to a sticky end, and the miners were only able to escape the same fate if they were able to get to safety in time. This very simple method of hazard detection was unable to identify which airborne substances posed the threat, nor their concentrations. Most importantly, however, the warning often came too late for effective protective steps such as escape, ventilation or oxygen supply to be taken.



Measuring gases in electrical units

The sensor is the most important component inside a gas detector. It converts the measured variable, e.g. a gas concentration, into an electrical signal. Depending on the sensor type, this is achieved by either chemical or physical processes. To obtain a meaningful and informative measured value readout, many factors have to be taken into account. Response times must be short, susceptibility to error low, and reliability high. The better the sensor, gas detector and central unit are designed to work together in accordance, the more reliable the measurement results will be. In industrial gas detection applications, three sensor technologies in particular are used on account of their excellent properties: electrochemical, catalytic and infrared measurement.






The electrochemical sensor principle

Electrochemical sensor

Electrochemical sensors work in a way similar to batteries. When the target gas is present, a small electrical charge is generated chemically between two electrodes, and displayed in the measuring head. The signal strength is proportional to the concentration.

One fundamental requirement is to achieve a stable sensitivity and good selectivity under all relevant ambient conditions. The sensors must be able to reliably withstand the tough conditions prevailing in an industrial setting, and do this 24 hours a day, all year round.

Over the years, Dräger has developed and placed on the market many different sensors for all kinds of gases and applications. Through our latest generation of sensors we make available the profound know-how we have gathered over these years so that you can perform your monitoring tasks. To this end, every sensor is equipped with an electronic memory chip (EEPROM) containing individual information: look-up tables for measured value compensation, coefficients for mathematical calculations,

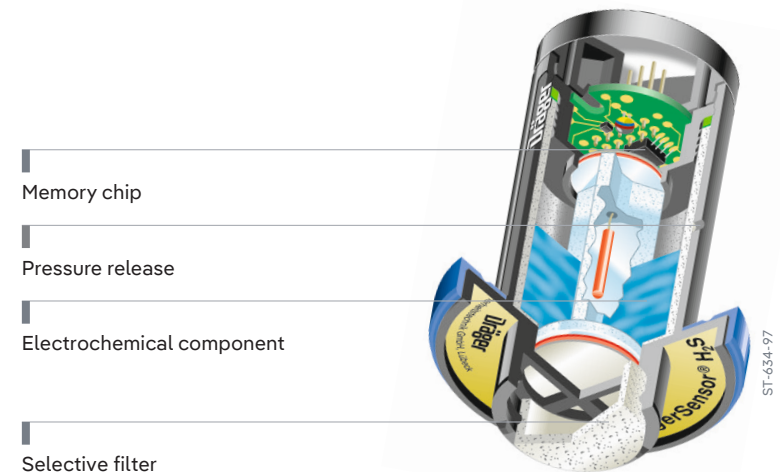

timing elements for process control and control bits for various special functions.

This intelligence means that a high signal quality can be achieved, which in turn results in a long service life with minimal maintenance requirements. This minimizes the overall costs of ownership of the gas warning system.

Plug-and-play equals smart sensor

Once a sensor has been manufactured, it is tested in the production department using the target gas. The individual data collected during this process, as well as many other standard parameters, are recorded and logged in the sensor memory. When the sensor is later connected to an intelligent Dräger transmitter, the instrument reads out this data and can perform the necessary configuration.

The adopted settings are designed to enable the highest possible measurement performance and user-friendly configuration for the individual device. The calibration is stored in the sensor before leaving the factory, meaning that the sensor is immediately ready for use.

On the basis of this plug-and-play principle, Dräger offers its customers electrochemical sensors for more than 100 toxic gases and oxygen, all of which can be used with the same universal transmitter. This gives you maximum flexibility and quick readiness for use.

Because the sensor and the transmitter are developed and manufactured by Dräger under one roof, the different properties of the two components can be designed to function perfectly together, resulting in the high customer benefit in terms of performance characteristics.


Stored intelligence

Pressure compensation for a longer service life

Electrochemical Dräger Sensors can be used in a temperature range of $-40\text{ }^{\circ}\text{C}$ to $+65\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F}$ to $+150\text{ }^{\circ}\text{F}$). To achieve such an extreme temperature span, sophisticated mechanical and electronic compensation mechanisms are needed. A patented porous housing made of PTFE surrounds the sensor and, in the

event of changes in pressure, allows the enclosed air to equalize pressure with the ambient air without any of the electrolyte escaping. In case of temperature changes, air pressure fluctuations and the absorption of water due to humidity in the air, are the consequences of mechanical stress and their influence on measurements minimized.

The result is a constant level of sensitivity and an outstanding service life of several years.

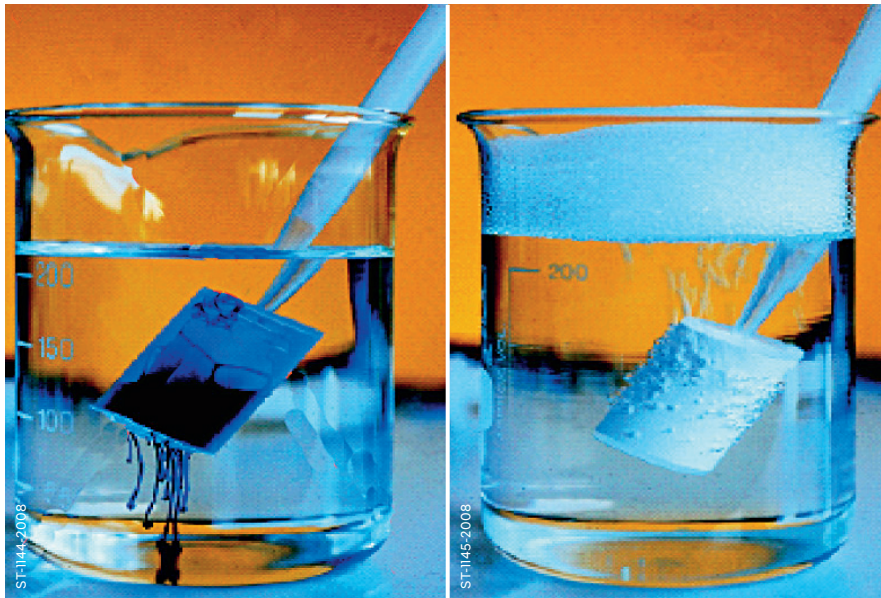

Demonstration of pressure compensation:

Immersion in warm water: on the left, electrolyte released due to positive pressure; on the right, effective compensation of positive pressure without damage to the sensor.

Organic electrolyte opens the door to ppb measurement

Not all gases can be detected using standard electrochemical technology, so for special applications Dräger has developed an organic electrolyte on a polycarbonate basis. Thanks to their better signal-to-noise ratio, these sensors can detect extremely low gas concentrations in the 10 ppb (parts per billion = $1:1,000,000,000$) range. What is more, the sensors show less cross sensitivity to standard toxic gases which can be present in very low concentrations in the ambient air. This results in lower detection limits, while false alarms are minimized greatly.

Functional safety with patented sensor test

The gas detector regularly performs a sensor test. This test is controlled on the basis of individual data from the memory device to ensure optimal testing of every sensor type in accordance with its properties. The test involves using an

LIST OF THE SUBSTANCES THAT CAN BE DETECTED WITH DRÄGER POLYTRON


AA	Ammonia	n-Butanal	i-Butyric aldehyde	CP	1,3-Dichloropropene	Dimethylether	EO	Ethyl ethanoate
Aald	AMS	i-Butane	n-Butyric aldehyde	Crotonaldehyde	Dichlorosilane	Dimethyl ethinyl carbinol	EP	Ethylethylene
AC	i-Amylacetate	n-Butane	C11	Crotonic aldehyde	1,2-Dichloro tetrafluoro ethane	N,N-Dimethylethylamine	Epichlorohydrine	Ethyl formate
Acetal	n-Amylacetate	1-Butane amine	C4=	Crotonylene	Dicyclohexyl	1,1-Dimethylethylamine	1,2-Epoxy-3-allyloxypropane	Ethyl glycol
Acetaldehyde	Amyl acetic ester	2-Butane amine	C4=	Cumene	Dicyclopentadiene	Dimethylethylamine	1,2-Epoxybutane	Ethyl glycol acetate
Acetaldehyde diethylacetal	i-Amyl alcohol	1-Butanol	C4=	Cyanoethylene	Diethoxy formic acid anhydride	Dimethyl ethyl carbinol	1,4-Epoxybutane	Ethylhexamethylene
Acetic acid	n-Amyl alcohol	2-Butanol	Carbinol	Cyanomethane	Diethoxy methyl silane	Dimethyl formamide	3,4-Epoxy-1-butene	Ethylidene chloride
Acetic acid allyl ester	tert-Amyl alcohol	i-Butanol	Carbolic acid	Cyclobutane	Diethylacetal	N,N-Dimethyl formamide	1,2-Epoxy cyclohexane	Ethyl mercaptan
Acetic acid i-amylester	n-Amylamine	n-Butanol	Carbon dioxide	Cyclohexane	Diethylamine	3,4-Dimethyl hexane	1,2-Epoxyethane	Ethylmethacrylate
Acetic acid n-amyl ester	Amylchloride	tert-Butanol	Carbonic acid diethyl ester	Cyclohexanol	2-Diethylaminoethanol	1,1-Dimethyl hydrazine	1,2-Epoxypropane	Ethyl methanoate
Acetic acid butylester	i-Amylchloride	2-Butanone	Carbonic acid dimethyl ester	Cyclohexanone	1,2-Diethylbenzene	N,N-Dimethyl hydrazine	2,3-Epoxypropyl chloride	Ethyl methyl carbinol
Acetic acid i-butylester	n-Amylchloride	Butanthiol	Carbonic acid ethyl methyl ester	Cyclohexene	o-Diethylbenzene	Dimethyl ketone	Erythrene	Ethyl methyl carbonyl
Acetic acid tert-butyl ester	n-Amylene	2-Butenal	Carbon monoxide	3-Cyclohexene-1-aldehyde	Diethylcarbinol	Dimethyl methane	ETBE	Ethyl methyl ether
Acetic acid dimethyl amide	i-Amylformate	1-Butene	Carbon oxychloride	3-Cyclohexene-1-carboxaldehyde	Diethyl carbonate	N,N-Dimethylmethane amine	Ethanal	Ethyl methyl ketone
Acetic acid ester	tert-Amylmethyl ether	2-Butene	Carbon tetrachloride	Cyclohexene oxide	Diethyldiglycol	Dimethyl nitromethane	Ethane	Ethyl nitrile
Acetic acid methoxy propylic ester	i-Amylmethylketone	i-Butene	Carbonyl chloride	Cyclohexylamine	Diethylene dioxide	2,4-Dimethyl-3-oxa-2,4-disilapentane	Ethane amine	Ethyl oxirane
Acetic acid methyl ester	n-Amyl methyl ketone	n-Butene	Carboxyethane	Cyclohexyl cyclohexane	Diethylene ether	Dimethyl oxide	1,2-Ethane diamine	Ethylpentamethyler
Acetic acid i-propenyl ester	AN	3-Butene-1-ol	CCHO	N-Cyclohexyl dimethyl amine	Diethylene glycol diethylether	2,3-Dimethylpentane	Ethanoic acid	1-Ethyl-1-propanol
Acetic acid i-propyl ester	Anhydrous ammonia	1-Buten-3-ine	Cellosolve	Cyclohexylethene	Diethylene monoxide	N,N-Dimethyl-1,3-propandiamine	Ethanol	Ethyl propionate
Acetic acid propyl ester	Anilin	3-Butenine-1	CG	Cyclohexyl ketone	Diethylene oximide	2,2-Dimethyl propane	Ethanoylchloride	Ethylpropionate
Acetic acid sec butyl ester	ANOL	1-Buten-3-one	CHA	Cyclohexyl methane	Diethyleneglycol dimethylether	N,N-Dimethyl-1-propane amine	Ethene	Ethylpropylketone
Acetic acid vinyl ester	ANON	2-Butine	1-Chlor-2-butene	Cyclopentadiene	N,N-Diethylethylamine	N,N-Dimethyl-i-propanolamine	Ethenyl acetate	Ethyl vinyl ether
Acetic aldehyde	Antimony-(V)-chloride	1-Butoxybutane	Chlorine	Cyclopentadiene dimere	N,N-Diethylethanolamine	Dimethylpropylmethane	Ethynyl benzene	Ethynyl carbinol
Acetone	Antimony hydride	2-Butoxyethanol	Chlorine dioxide	Cyclopentane	Diethyl ether	Dimethyl sulphide	4-Ethenyl cyclohexene	ETM
Acetone dimethylacetal	Antimony pentachloride	1-Butoxy-2-propanol	Chlorine peroxide	Cyclopropane	Diethyl ketone	Dinitrogen monoxide	Ethenyl oxirane	Ethyl carbinol
Acetonitrile	Antimony trihydride	2-Butyl acetate	Chlorine trifluoride	Cyclohexane amine	Diethylmethylmethane	1,4-Dioxane	Ether	ETOH
	Arsenic hydride	i-Butyl acetate	Chloroacetaldehyde	DBPO	Diethyl oxide	1,3-Dioxo cyclopentane	Ethine	EVE
		n-Butyl acetate	3-Chloroallyl chloride	DC245 Fluid	Diethyl sulphide	1,3-Dioxolane	Ethynyl dimethyl carbinol	Fluorine
			Chloroallylene		Diethyl thioether	DIPA	Ethoxy carbonyl chloride	Fluoroethene
					Difluoro chloroethane	Di-i-propyl	2-Ethoxyethanol	Fluoromethane
								Fluothrane
								Forane
								Formal

electrical pulse to stimulate the sensor, similar to exposing the sensor to gas. The sensor must now respond by emitting the corresponding output signals. This ensures that the correct measurement signal will be generated when gas reaches the sensor's measurement electrode. The test has no effect on the sensor's normal measurement function.

This results in a high level of reliability and availability of the electrochemical measurement function.

Selective filters to prevent false alarms


Exchangeable selective filters increase sensor performance in terms of selectivity. Once a filter is used up, it can easily be removed for a replacement filter. This is an effective means of suppressing certain irritating cross-sensitivities.

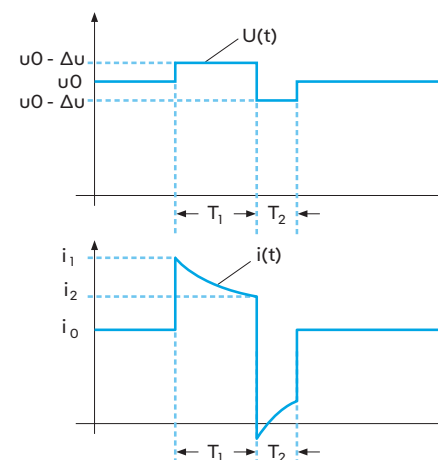

Sensor test

Test pulse (top) and sensor response (bottom).

ST-1147-2008

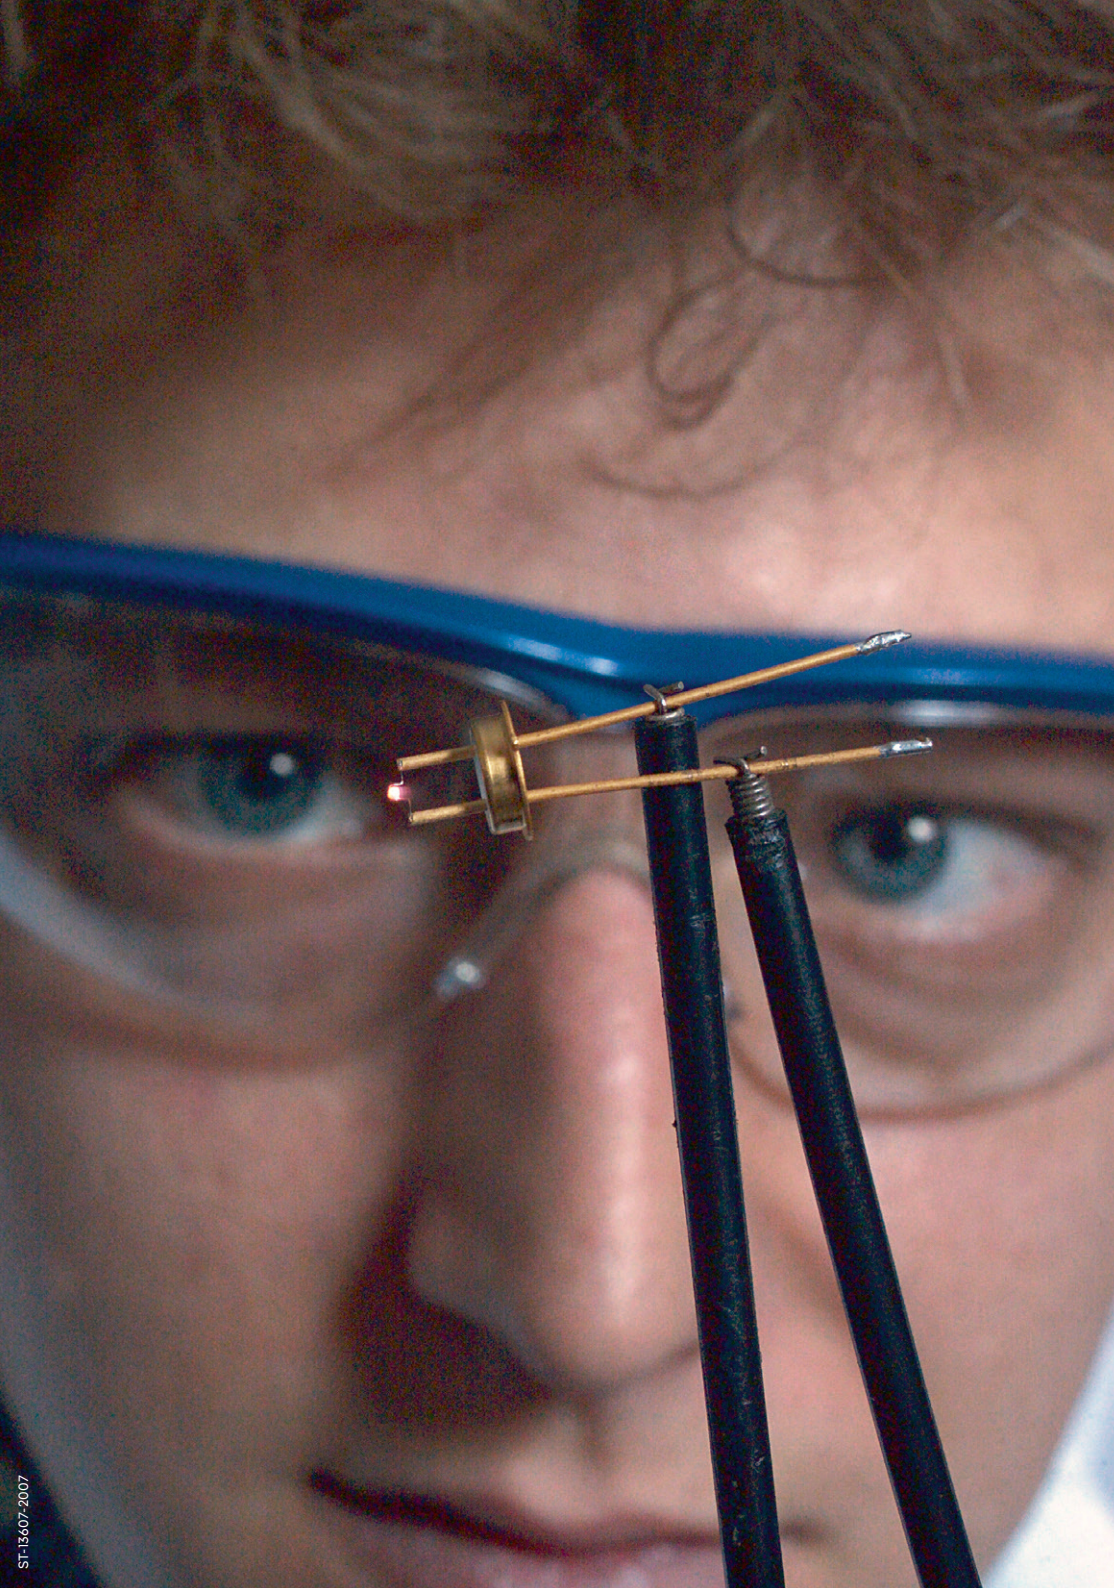

The catalytic sensor principle

How can flammable gases be measured?

Easy – by burning them. But not, of course, using a naked flame, as they are supposed to be detected before they form a flammable mixture with air. Chemists describe this process as oxidation, which requires air (oxygen), fuel and a substance which will enable a reaction between the two, namely a catalyst which is attached to a heat-resistant ceramic body.

Yes, this is just the sort of catalytic converter which you would find in your car. The only difference is that it is of virtually no interest whether the catalytic converter in your car becomes even hotter than it is already as a result of the oxidation reactions (e.g. when hydrocarbons which have not yet combusted become water vapor and CO₂) – all that matters is that it should be as effective as possible.

We, on the other hand, are interested in the slight increase in temperature which occurs during this type of oxidation process because, as is commonly known, any oxidation involves a heat of reaction, which is a measure of the number of reactions that have taken place. And a few clever tricks are all that is needed

Hot beads detect gases

How can flammable gases be measured?

Such beads are known as pellistors, a made-up term created from the words pellet and resistor. The pellistor being immune to gas (compensator) is used to measure the ambient temperature, while the pellistor with the catalyst (detector) is used to measure the ambient temperature plus heat of combustion, where the difference between the two signals – a measure of the gas concentration – is generated electrically.

For pure air, the difference must of course be zero, which is why this is set to zero in the associated electronics. When both pellistors are then exposed to, for example, 0.85 % by volume propane, the associated electronics only has to be adjusted so that it displays “50 %LEL”. Thereafter the settings are left unchanged, and the detector is “calibrated to propane”.

In this context, 50 %LEL means that the propane gas concentration is already hazardous but far from flammable. Only once the LEL (the lower explosion limit) is exceeded by 100 % can propane ignite in air, i.e. only above 1.7 % by volume.

Although there is virtually no end to the possibilities offered by catalysts, the main priority when manufacturing high quality catalytic bead sensors is to attain sensor properties such as high effectiveness, signal stability, solidity, resistance to catalyst poisoning, reproducibility and, above all, outstanding durability and short response times – Dräger achieves this with its extensive know-how acquired during the course of 30 years. After all, catalytic bead

sensors need to be operated continually for months at a time, without requiring maintenance, and must be able to reliably detect very slight temperature differences – frequently in hostile climatic conditions.

What is more, the sensor must of course not become an ignition source itself in the event that concentrations in excess of 100 %LEL are present. The two beads, at temperatures of roughly 400 °C (752 °F), could possibly be able to ignite some gases and vapors, were it not for the ignition protection measures in place. Thanks to the solid explosion proof design and the gas-permeable sintered metal or wire mesh disc, flashback into the hazard area is reliably prevented – that is true explosion protection.

Dräger produces three types of sensor designed for gas detection systems:

The all-rounder

The Dräger Polytron SE Ex PR M DD detector head has become the universal industry standard. It is used wherever there is a probability that flammable gases and vapors will be released in order to actively prevent a potentially explosive atmosphere from occurring (this is known as preventive explosion protection). The operator is alerted by the central unit, while at the same time a pre-alarm (e.g. 20 %LEL) causes countermeasures to be activated (e.g. fresh air is blown in to reduce the concentration of the flammable gas). If this measure fails, the concentration continues to rise and the main alarm is triggered (e.g. when 40 %LEL is reached), resulting in a forced shutdown. The Dräger Polytron SE Ex PR M DD with the central units Dräger

Explosion protection means reliably excluding at least one of the three prerequisites for ignition.

REGARD, REGARD 1 and REGARD 3900 were type-examined for suitability for this application by an independent testing authority.

The early-warning instrument


The Dräger Polytron SE Ex LC M DD (LC = Low Concentration) detector head is suitable for reliably detecting very low gas concentrations. It is used not so much for preventive explosion protection as for the early detection of flammable gases and vapors with concentrations far below 10 %LEL. Typical alarm thresholds are 3 %LEL and 5 %LEL, equivalent, for example, to 300 ppm and 500 ppm hexane respectively. The explosion proof sensor contains complex amplification electronics which are individually calibrated during production to a number of different parameters.

The heat resistant instrument

The Dräger Polytron SE Ex HT M DD (HT = High Temperature) detector head is approved for use at ambient temperatures of up to 150 °C (300 °F). It is normally used in applications where extremely high temperatures are commonly found, especially for detecting leaks in the immediate vicinity of gas turbines. The temperature-resistant connection terminals are located in a galvanized cast iron housing.

Also available as remote sensors


The sensing heads described above, when combined with transmitters like the Dräger PEX 3000, can also be operated as remote instruments, i.e. in areas which are difficult to access the sensor can be operated separately to the transmitter electronics.

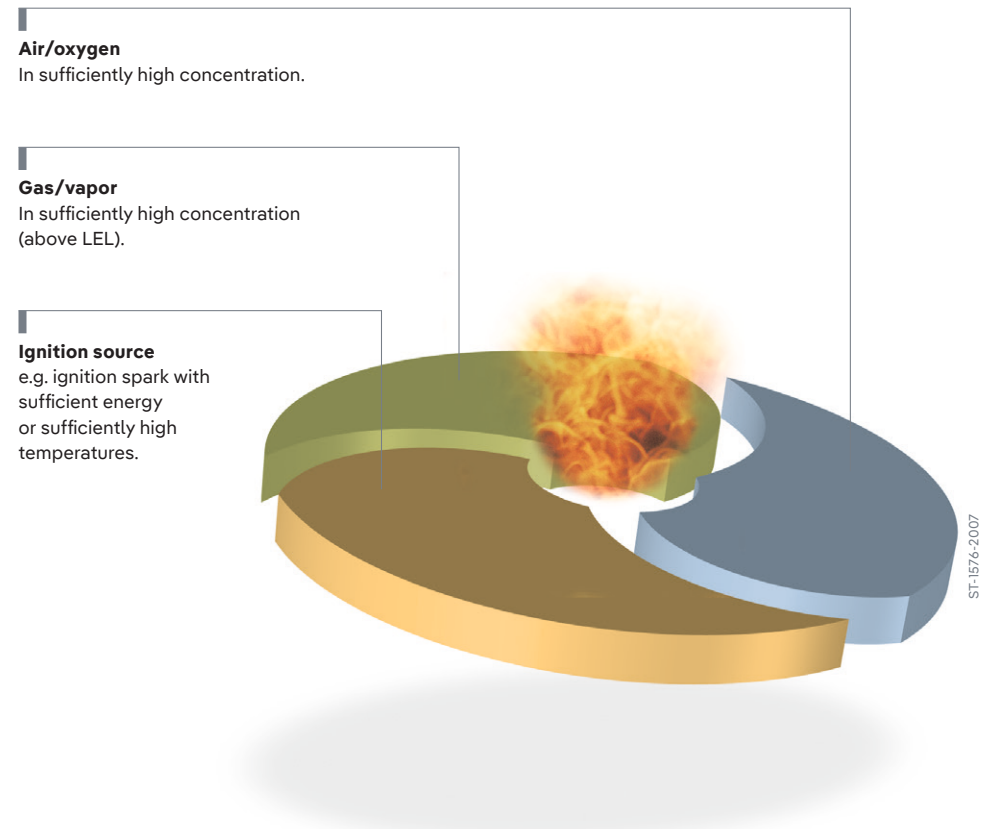

Suitability testing

The catalytic bead sensor has been tested for suitability for detecting many different gases and vapors by a recognized testing authority (Notified Body as stipulated by the ATEX Directive): methane, propane, acetone, acetylene, ammonia, petrol 065/095 (FAM normal gasoline), benzene, 1,3 butadiene, n-butane, n-butyl acetate, cyclopropane, diethyl ether, dimethyl ether, ethanol, ethylene (ethene), ethyl acetate, ethylene oxide, n-hexane, methanol, methyl ethyl ketone (MEK), n-nonane, n-octane, n-pentane, i-propanol, propylene (propene), propylene oxide, toluene and hydrogen.

In all, more than 200 different flammable gases and vapors can be reliably detected using catalytic bead sensors.

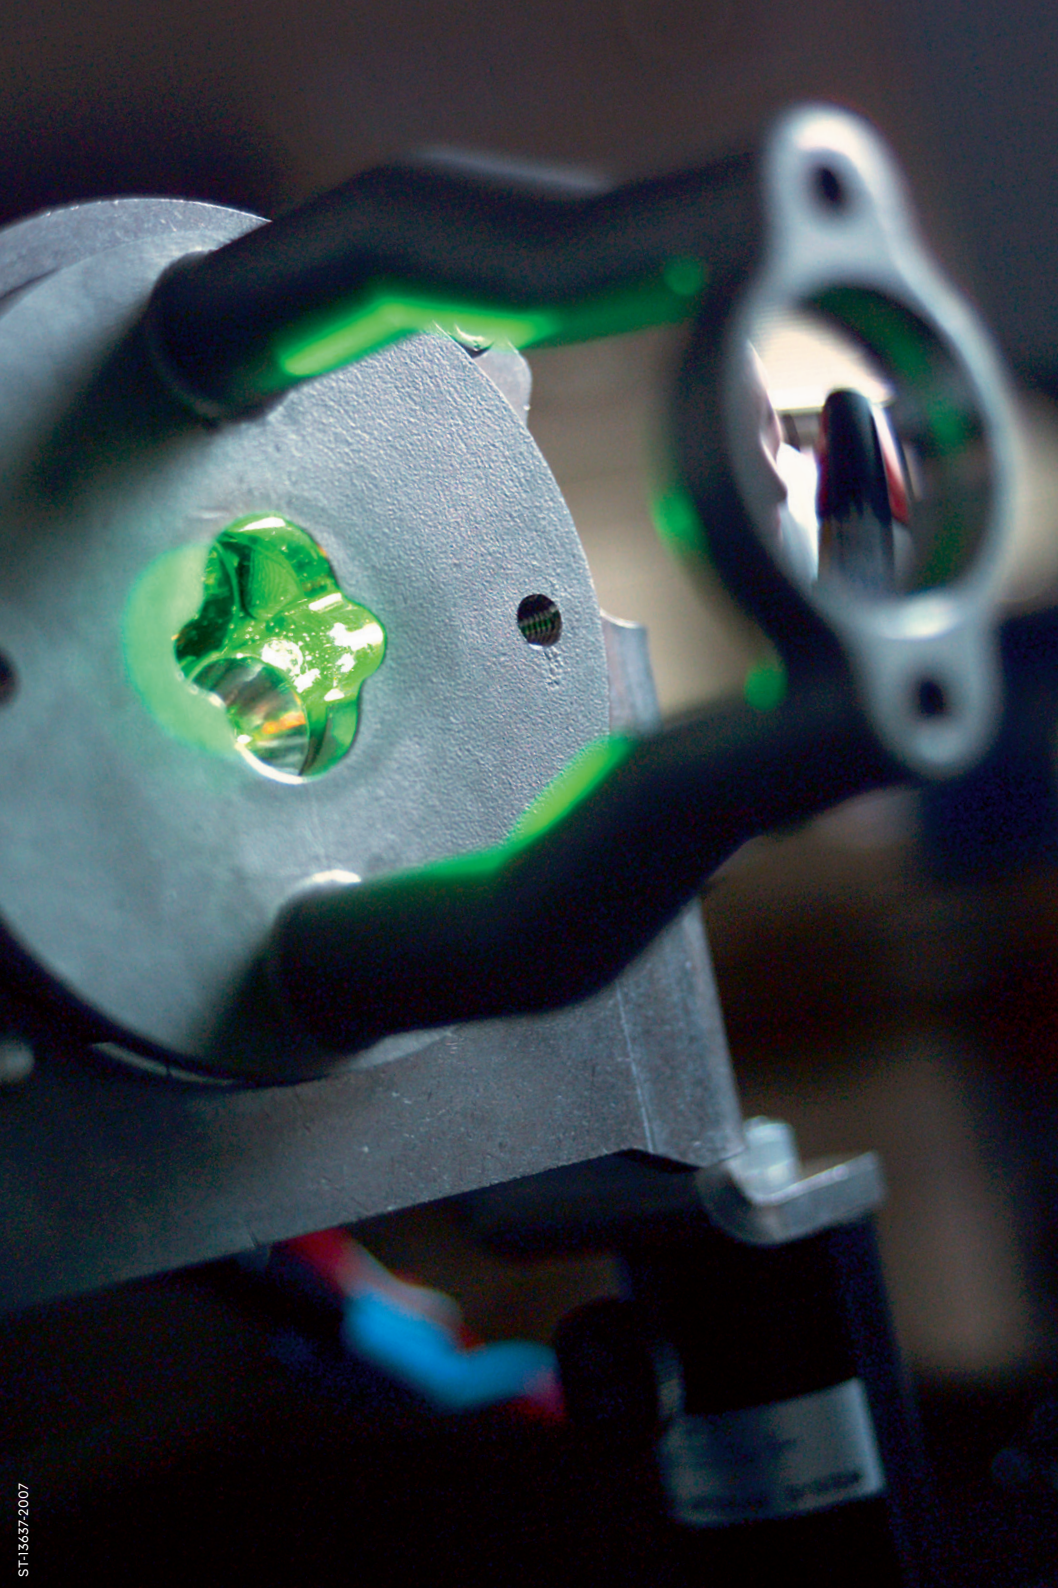

The infrared sensor principle

Infrared absorption

Whenever substances contain both carbon (C) and hydrogen atoms (H), i.e. hydrocarbons, their C-H bonds can briefly absorb part of the infrared radiation. This slightly weakens the intensity of the emitted light.

Light-sensitive pyrodetectors are able to register this weakening, while downstream electronics can calculate a signal on this basis which serves as a reliable indicator if a gas concentration is present.


The concentrations that can be measured by means of infrared absorption range – depending on the substance in question – from a few hundred ppm (parts per million) up to 100 % by volume.

This method is often used to detect flammable gases and vapors within their 0 to 100 %LEL ranges, though it can also be used for the early detection of even small leaks (in coolant circuits, for example) so that more serious damage can be avoided.

Principle of operation of infrared absorption (measurement cuvette)



Only the green part of the light radiation is filtered out and its intensity measured.

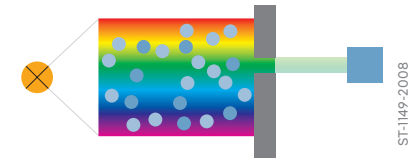

If a gas absorbs the green part of the light radiation, its intensity is measurably reduced.


Safe operation

All the components needed to perform the measurement – light sources, detectors, signal amplifiers, processors, memory chips, heating elements etc. are protected against external influences.

In most IR gas detectors, a solid explosion proof stainless steel housing acts as a hermetic seal, protecting the interior components from dirt, moisture, corrosive gases and other factors which might impair the measurement.

The constant readiness for use of the components is continuously monitored internally, and any component failure immediately triggers a fault alarm – aiming for true “fail-safe” operation!

Many Dräger IR transmitters feature SIL (Safety Integrity Level) certification, and have been approved by the independent testing authorities exida and TÜV. They confirm that this sensor technology is ideally suited to applications where demands for functional safety are high.

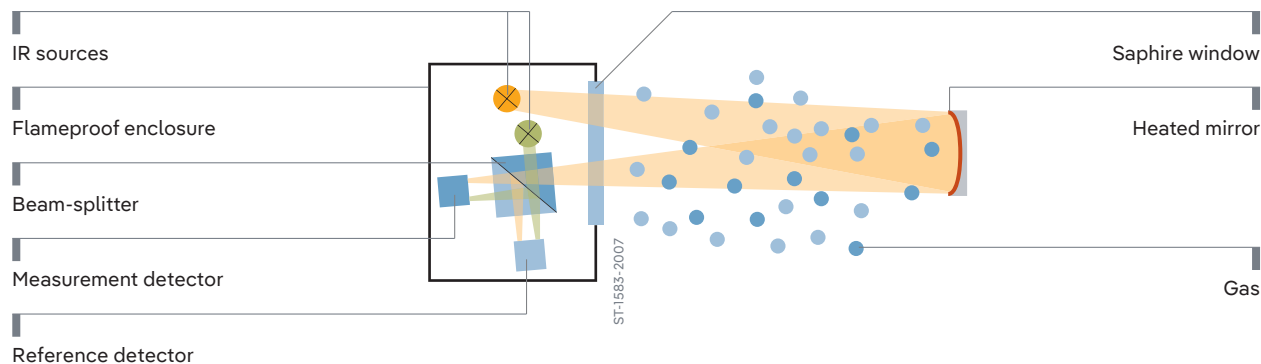

Schematic diagram of an IR transmitter (explosion proof)

Precise reflection

Stable – even under adverse conditions

A stable measurement signal – even a “stable zero” if no hydrocarbons are present – is one of the key requirements in industrial applications. False alarms are simply unacceptable, as they can result in emergency shutdowns, production downtime and even plant evacuations.

Dräger sets global standards with its forward-looking innovations, such as double compensation of temperature and ageing effects, the 4-beam technology for high resistance to contamination, and the beam block warning for preventive maintenance.

For more than 30 years we have succeeded time after time in meeting our customer's exacting requirements and continuously raising the bar just a little bit higher each time: one typical challenge when it comes to IR gas detectors, for example, is to prevent contamination in the measurement cuvette from negatively affecting the measurement signal.

The Dräger PIR 7000 achieves a new quality and perfect balance between signal strength and contamination resistance in this respect: thanks to its perfectly harmonized multi-mirror optics, the instrument maximizes its use of the available light,

meaning that even a significant build-up of dust or dirt particles has no effect on its measurement properties.

Best possible linearity and convenient operation

Due to the non-linear absorption behaviour of the great majority of hydrocarbons, individual linearized characteristics would theoretically need to be described for every single substance. The goal must be to enable the IR transmitter to calculate a signal which, as far as possible, increases proportionally to the rise in gas concentration.

To this end, the Dräger PIR 7000 features a “gas library” containing up to 62 substances, which offers the world's biggest choice of linearizations (29 substances have additionally been tested and certified for measurement performance according to ATEX).

And even if the substance to be monitored has not yet been included in the gas library, there is at least a very good chance of finding among the 62 different linearizations one which comes very close to the required absorption behaviour.

And best of all, calibration of sensitivity can still be performed conveniently with standard test gases (e.g. methane, propane



or ethylene). The Dräger PIR 7000 automatically converts the different gas parameters of the desired target gas and the standard test gas accordingly – approved according to ATEX.

Infrared – the first choice

Infrared gas detectors are therefore the first choice nowadays for stringent industrial requirements (e.g. in chemical plants or in the automotive industry) and for applications with adverse ambient conditions (e.g. on offshore oil rigs).

Hydrocarbons, and indeed carbon dioxide (CO₂) can be reliably and accurately detected using infrared sensor technology.

The combination of monitored operational readiness, stable measurement characteristics, durable design and minimal maintenance requirements has proved persuasive for our customers, and has resulted in more than 100,000 installed infrared sensors worldwide.

Made in Germany

Dräger is one of the world's pioneers in the development and pushing ahead of sensor technology. In its own laboratories at the company's Lübeck headquarters, Dräger conducts basic research and technology studies.

Dräger strives constantly to improve all its safety technology. Whenever current technologies, new materials, changed production processes or tougher legal regulations give rise to additional requirements, Dräger is already on the way of meeting them.

Besides developing highly specialized niche products, we research ways of reducing cross-sensitivities and lowering detection limits. We are also improving economic aspects continuously, e.g. by reducing costs of ownership.

We forge lasting relationships with our customers. For over 120 years, mutual trust has been the basis for our path together into the future.





Gas detection technology requires a high level of precision. Not only the integrity of systems and machines, but also human lives depend on the reliability of a gas warning system.



Sensor technology cannot be viewed on its own. Just like in a car, it is not the engine alone which determines driving comfort. It is only when all the individual components work together in harmony that you achieve an optimal system.



The whole is more than the sum of its parts

At Dräger, an entire team of engineering specialists and sensor experts always works together on the design and development of gas warning systems. The team takes account of current technologies and devises new systems of hazard prevention. Solutions are planned which are tailored precisely to the relevant customer requirements.

The modular design of Dräger systems helps to ensure that your safety concept will meet all existing and future requirements long-term. New instruments and sensors can be added into existing systems, while systems using today's components can be expanded, changed or modernized at virtually any time.

Besides offering a uniquely wide range of sensors, measuring instruments, and technical components, Dräger provides support for a wide range of topics.

Not all products, features, or services are for sale in all countries. Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

Corporate Headquarters

Drägerwerk AG & Co. KGaA
Moislinger Allee 53-55
23558 Lübeck, Germany

www.draeger.com



Locate your Regional Sales
Representative at:
www.draeger.com/contact

Region Europe

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
☎ +49 451 882 0
☎ +49 451 882 2080
✉ info@draeger.com

Region Middle East, Africa

Dräger Safety AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
☎ +971 4 4294 600
☎ +971 4 4294 699
✉ contactuae@draeger.com

Region Asia Pacific

Draeger Singapore Pte. Ltd.
61 Science Park Road
The Galen #04-01
Singapore 117525
☎ +65 6872 9288
☎ +65 6259 0398

**Region Central
and South America**

Dräger Indústria e Comércio Ltda.
Al. Pucurui - 51 - Tamboré
06460-100 - Barueri - São Paulo
☎ +55 (11) 4689-4900
✉ relacionamento@draeger.com